


AT898

SUBMINATURE CARDIOID CONDENSER MICROPHONE

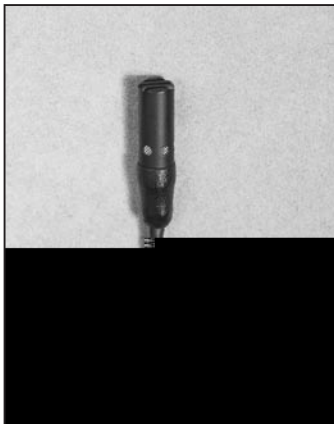

- Maximum intelligibility and clean, accurate reproduction for lecturers, stage and television talent, and worship leaders
- requiring minimum visibility
- Includes an extensive array of accessories
- Switchable low-frequency roll-off reduces sensitivity to popping in close vocal use
- Operates on battery or phantom power

The AT898 is designed to be worn as a lavalier or hidden in loose clothing. For use as a lavalier, attach the microphone about six inches below the chin. Anticipate movements that may cause the microphone to rub against or be covered by clothing, and position the microphone to avoid it.

The included single and double mic holders are interchangeable with all the bases. To change the holders, simply remove original holder and snap in the desired one. When using the AT898 in extremely close situations, slip the included open-pore foam windscreen over the mic to reduce wind noise or "popping."

viper clip to clothing. The pins are sharp and may puncture skin. For best results, ensure that pin ends rest on outside of clothing.

operation. A battery need not be in place for phantom power operation.

Battery installation: Unscrew the base of the power supply unit and insert one AA battery into the battery compartment, being certain to observe battery polarity as marked. Then simply screw the base shut. Alkaline batteries are recommended for longest life. Remove the battery during long-term storage.

Output from the power module's XLRM-type connector is low



in the EU directive on hazardous substances.

Avoid leaving the microphone in the open sun or in areas where humidity should also be avoided.



AT898

**BROADCAST
& PRODUCTION**
MICROPHONE

